




# HR Plus w. Aperture Stop Body Lens Mount & Filter

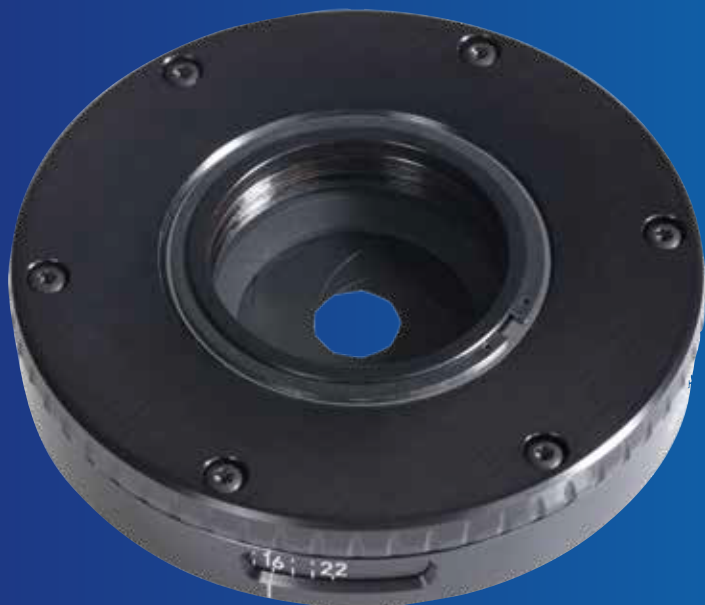


## Developed by us ...

Rodenstock HR Digaron Plus are successfully used as the optical imaging component for digital photography in professional fields such as architecture, landscape, cultural heritage and industry, as well as by ambitious amateurs. In addition to classic digital medium format photography using digibacks, HR Digaron Plus are increasingly being adapted to cameras that have their own electronic shutters. The percentage of digibacks with global shutter will also increase. We are well prepared for these market trends and have developed an integrated aperture stop body for our HR Digaron Plus series. We intentionally do not use the conventional shutter. Take advantage of our latest development and save costs!

## ... the benefits for you

- **Economical:** Lenses without shutter reduce your expenses
- **Universal:** For all camera systems with integrated shutters or digital backs with global shutters
- **Compatible:** Connection dimensions identical to Copal 0 shutters
- **Universal:** Can be used for all camera systems with integrated shutters or digital backs with global shutters (Alpa, Cambo, Sinar etc.)

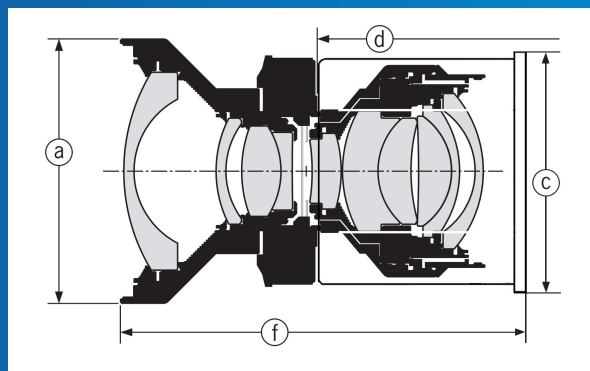

## Rodenstock HR Plus w. Aperture Stop Body, lens mount, filter

| Part-No.                        | Objective                            |
|---------------------------------|--------------------------------------|
| Lens mount                      |                                      |
| 0016-006-020-38                 | Lens mount                           |
| HR Plus Lenses                  |                                      |
| 0029-022-000-38                 | 1:4.0/32 mm                          |
| 0029-025-000-38                 | 1:4.0/40 mm                          |
| 0029-026-000-38                 | 1:4.0/50 mm                          |
| 0029-040-000-38                 | 1:5.6/70 mm                          |
| Specification                   |                                      |
| Maximum sensor or stitch format | 40x54mm, Image circle diameter >90mm |
| Shutter size                    | Copal 0                              |
| Diameter (c)                    | > 75mm                               |
| Recomm. working aperture        | 5.6~8                                |
| Discription*                    |                                      |
| Overall length (f)              | > 132mm                              |
| Weight with lens mount          | > 995g                               |

\* Please refer to the lens manual for other data.

For detailed information please visit our website  
[www.rodenstock-photo.com](http://www.rodenstock-photo.com) or send us an email to  
[photo@excelitas.com](mailto:photo@excelitas.com).

[www.excelitas.com](http://www.excelitas.com)

Qioptiq Photonics GmbH & Co.KG  
 Rodenstock Photo Optics  
 Hans-Riedl-Str. 9  
 85622 Feldkirchen, Germany